


# Distalarm serie 200

## Central 215 : detection at 1 threshold, able to associate up to 6 detectors

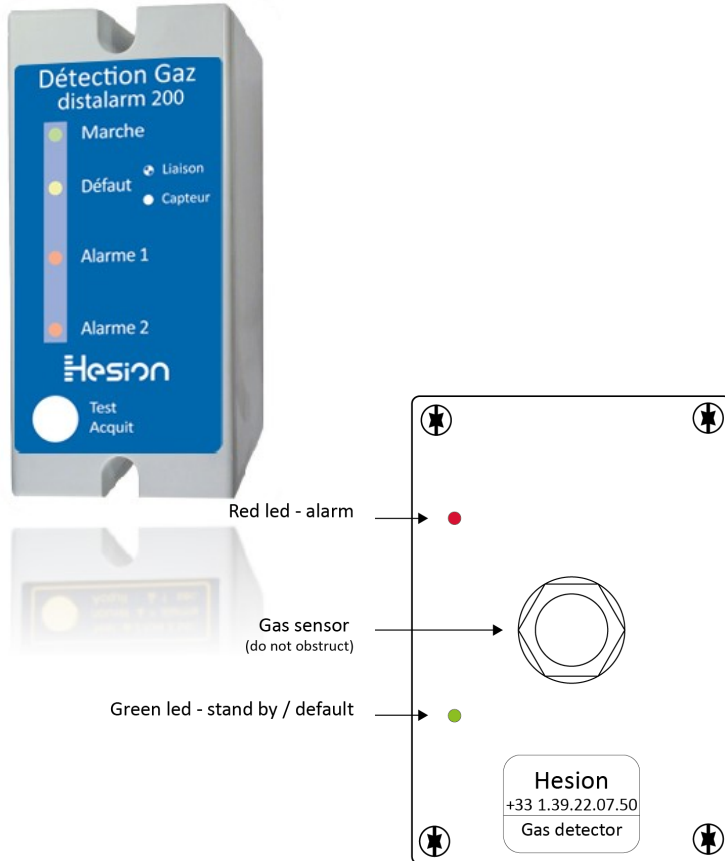

### Extensive range of functions:

- alarm or fault states reported on detectors.
- visualisation on the central unit of all the defects concerning the detectors, the electronics and the lines of connection.
- each detector monitors its own supply voltage and reports any abnormality.

### Options :

- second relay.
- internal sound signal (buzzer).
- additional deported sound signal.
- additional deported visual signal.

## Characteristics

### Dimensions :

- H 112 mm, L 52 mm, P 106 mm

### Implantation :

- directly on the wall
- in a cabinet (on a DIN rail)

### Power :

- sector 230 Vac
- 12Vcc, 24Vcc (power supplied with battery available)

### Display :

- LEDs

### Action area :

Boiler room, Refrigeration system, Laboratory...

- up to 6 detectors
- 2 to 4 detectors max. in refrigeration according to the type of central

### Cabling and commissioning:

- central connected to the detectors by a cable SYT1 2p 9/10, ready to operate.
- via a plug-in terminal block, autonomous commissioning and simplified maintenance.
- detectors connected exclusively in series.

# Distalarm serie 200


## Centrals 215 and compatible detectors

Central	Power	Detectors - Reference and maximum quantity							
		SA21A	SB21A	SB21A	SH21A	EH21A	EA21A	SX21F	SX21X
		Methane	Propane	Butane	Hydrogen	Sulfurated Hydrogen	Carbon Monoxide	Freon	Other Gas
215 A	230 Vac	4	4	4	4	6	6		4
215 X	230 Vac External Power	6	6	6	6				
215 AF	230 Vac						2		
215 XF	230 Vac External Power						4		
215 D	12 Vcc	6	6	6	6				6
215 C	24 Vac	4	4	4	4				6
215 G	24 Vcc	6	6	6	6				6

For applications that require it, the control unit complies with directive N° 94/9/CE du 23/03/94 in the category cATEX A II (3) G. It constitutes « an associated material », with a mode of protection towards the zone at risk according to [Ex ic] IIA (EN 60079-0 et EN 60079-11).

# Distalarm serie 200

## Central 225 : detection at 2 threshold, able to associate up to 6 detectors

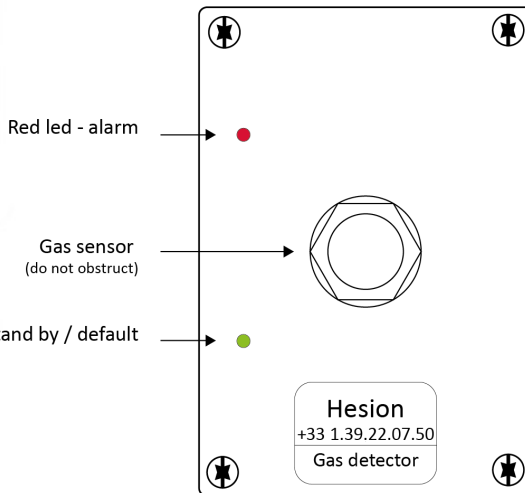

### Extensive range of functions :

- alarm or fault states reported on detectors .
- visualisation on the central unit of all the defects concerning the detectors, the electronics and the lines of connection.
- different takeover depending on the treshold.
- each detector monitors its own supply voltage and reports any abnormality.

### Options :

- internal sound signal (buzzer).
- additional deported sound signal.
- additional deported visual signal.

## Characteristics

### Dimensions :

- H 112 mm, L 52 mm, P 106 mm

### Implantation :

- applied directly
- in a cabinet (on a DIN rail)

### Power :

- sector 230 Vac
- 12Vcc, 24Vcc (power supplied with battery available)

### Display :

- LEDs

### Action area :

Boiler room, Refrigeration system, Laboratory...

- up to 6 detectors
- 2 to 4 detectors max. refrigerant according to the type of central

### Cabling and commissioning :

- central connected to the detectors by a cable SYT1 2p 9/10, ready to operate.
- via a plug-in terminal block, autonomous commissioning and simplified maintenance.
- detectors connected exclusively in series.

# Distalarm serie 200

## Centrals 225 and compatible detectors

Central	Power	Detectors - Reference and maximum quantity							
		SA22A	SB22A	SB22A	SH22A	ES22A	EA22A	SX22F	SX21X
		Methane	Propane	Butane	Hydrogen	Sulfurated Hydrogen	Carbon Monoxide	Freon	Other gas
225 A	230 Vac	4	4	4	4	6	6		4
225 X	230 Vac External Power	6	6	6	6				
225 AF	230 Vac							2	
225 XF	230 Vac External Power							4	
225 D	12 Vcc	6	6	6	6				6
225 C	24 Vac	4	4	4	4				6
225 G	24 Vcc	6	6	6	6				6

For applications that require it, the control unit complies with directive N° 94/9/CE du 23/03/94 in the category cATEX A II (3) G. It constitutes « an associated material », with a mode of protection towards the zone at risk according to [Ex ic] IIA (EN 60079-0 et EN 60079-11).