
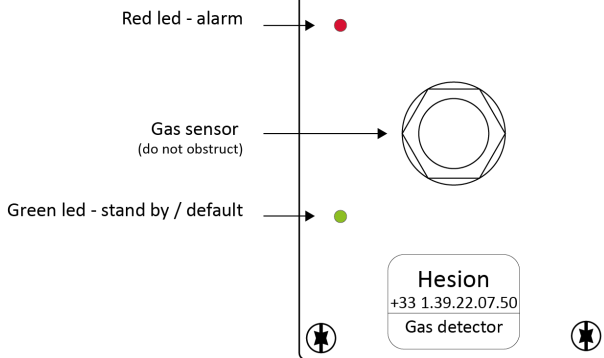


Distalarm serie 600

Multi-zone detection central with 3 thresholds, able to associate and locate 18 or 36 detectors

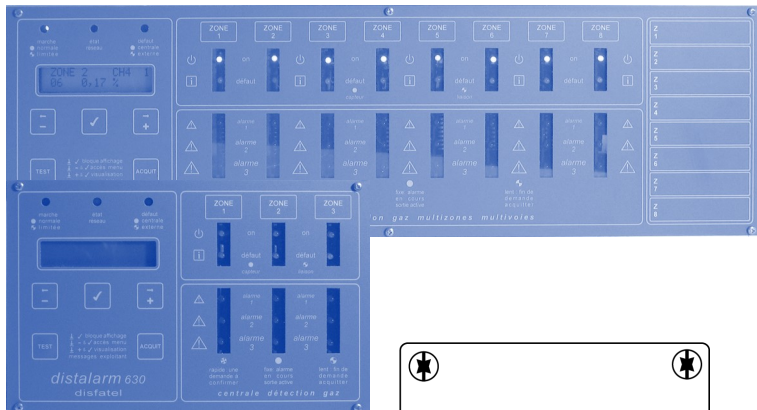

Extensive range of functions:

- up to 6 gas.
- alarm or fault states reported on detectors
- visualisation on the central unit of all the defects concerning the detectors, the electronics and the lines of connection.
- each detector monitors its own supply voltage and reports any abnormality.
- different takeover depending on the threshold.
- labels of detectors are modifiable and thresholds are adjustable..

Options :

- additional deported sound signal.
- additional deported visual signal.

Characteristics

Dimensions :

- 630 : H 230 mm, L 220 mm, P 205 mm
- 680 : Rack 19"
-

Implantation :

- 630 : applied directly
- 680 : integrable in a patch panel

Power :

- sector 230 Vac (other power supply on demand)

Display :

- LCD Screen
- LEDs for each threshold/zone

Action area :

Industry, Boiler room, Refrigeration system, Laboratory...

- Up to 3 or 8 zones
- 4 or 6 detectors max. per zone and depending on the type of central

Cabling and commissioning :

- central connected to the detectors by a cable SYT1 2p 9/10, ready to operate.
- via a plug-in terminal block, autonomous commissioning and simplified maintenance.
- detectors connected exclusively in series.

Distalarm serie 600

Centrals 630 / 680 and compatible detectors

		Methane	Propane	Butane	Hydrogen	Sulfurated Hydrogen	Carbon Monoxide	Freon	Other gas
Central	Power	Detectors - Reference and maximum Quantity							
		SA63A	SB63A	SB63A	SH63A	ES63A	EA63A	SX63F	SX63X
zone		6	6	6	6	10	10	4	
630	230 Vac	18	18	18	18	18	18	12	
680	230 Vac	36	36	36	36	36	36	32	

For applications that require it , the control unit complies with directive N° 94/9/CE of 23/03/94 in the category cATEX A II (3) G. It constitutes an " associated material ", with a mode of protection towards the zone at risk according to Ex ic] IIA (EN 60079-0 et EN 60079-11).